


SBL-1300SEF

AUTOMATIC FOIL STAMPING AND DIECUTTING PLATEN

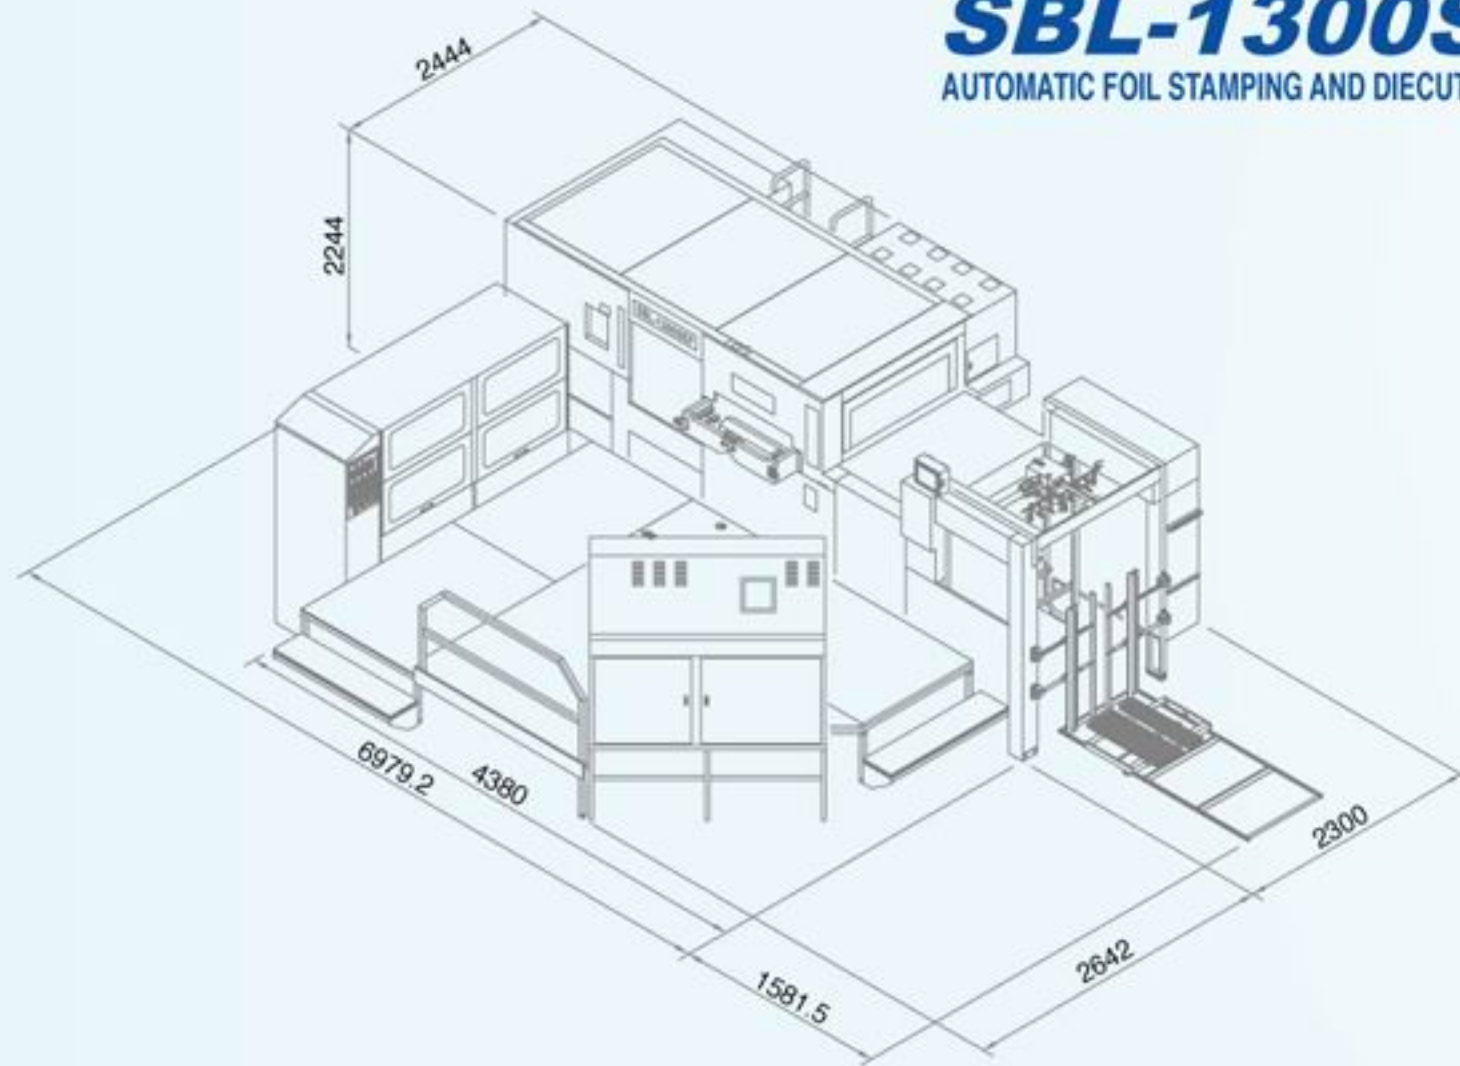

FOIL STAMPING SPECIFICATIONS

Foil unwind shafts (Optional)	2 (3) (4)
Max. foil diameter	ø200mm
Rewind shafts	8
Max. rewind diameter	ø400mm
Max. hologram stamping area	930 x 1260mm
Max. stamp speed	4000 sheets/hr
No. of heating zones	18 zones
Foil stamper power required	36 kw
Honeycomb	1 pc

DIE-CUTTING SPECIFICATIONS

Maximum paper size	1300 x 950 mm
Minimum paper size	600 x 450 mm
Maximum cutting size	1290 x 940 mm
Maximum cutting pressure	500 Tons
Stock range	0.1-2 mm
Minimum gripper margin	9.5 mm
Inner size of chase	1420 x 958 mm
Size of cutting plate	1328 x 940 mm
Maximum mechanical speed	6000 Sheets / hr
Power of die-cutter	15 kw
Total power	12 kw
Machine length	8410 mm
Machine width	5080 mm
Machine height	2244 mm
Total weight (approx.)	21.5 Tons

Specifications are subject to change without notice for improvement.



TSAIR SHUENN MACHINERY INDUSTRY CO., LTD.
SBL MACHINERY CO., LTD.
 No. 168 Chung Yang Rd., Sec.3, Tu Cheng City, Taipei Hsien, Taiwan.
 Tel : 886-2-22673770 Fax : 886-2-22676193
<http://www.sblmachinery.com> E-mail : info@sblmachinery.com

SHIN TSAIR SHUENN MACHINERY (SHEN ZHEN) CO., LTD.
 No. 19, Da Tang Ind. District, Dong Hong Village Song GangTown Baoan,
 Shen Zhen China.
 Postal Code : 518105
 Tel : 86-755-33860588 Fax : 86-755-33860598
 E-mail : shin-tsair-shuenn@21cn.com

UK Branch
SBL MACHINERY UK LTD.
 Unit 5A Foxway Trinity Business Park, Wakefield West Yorkshire,
 WF2 8EE England.
 Tel : (44)01924385134 Fax : (44)01924385136
<http://www.sbl.idv.tw> E-mail : sbl1050@aol.com



SBL-1300SEF

AUTOMATIC FOIL STAMPING AND DIECUTTING PLATEN





FEEDER



TOUCH SCREEN
MONITOR SYSTEM



SHEET SLOW DOWN DEVICE



REGISTER DEVICE



PNEUMATIC CHASE
LOCKING & AUTOMATIC
IMPRESSION ON/OFF SYSTEM



DIE-CUTTING SECTION



HONEYCOMB
HEATING SYSTEM



FOIL CONTROL SYSTEM



HEATER ZONE
CONTROL CENTER



FOIL REWINDER



BRUSH REWINDING
DEVICE (OPTIONAL)

- EASY OPERATION
- HIGH EFFICIENCY
- ECONOMICAL AND PRACTICAL
- THE MOST IDEAL CHOICE



FEATURES

1. Computerized foil feeding system with 3 foil control shafts to precisely control the foil length as desired.
2. 18 zones heating system with precise temperature controller can be set individually .
3. Automatic pressure on/off system with tonnage searching program pre-set at low tonnage to avoid damaging die and machine.
4. Pneumatic honeycomb and chase locking system to eliminate loose mechanical parts.
5. LCD Digital display indicates the correct side guide at 90° angle to the front lays .
6. Non-stop device for feeder and delivery station can ensure continuing production .
7. Touch screen monitor with computerized self-diagnostic system is easy to operate and helpful for troubleshooting on each section.
8. Cutting pressure can be adjusted according to the stocks and the maximum pressure can up to 500 tons .
9. Recycling oil temperature controller to maintain an even cutting pressure .
10. Special brush push down device and joggle device at delivery station to ensures proper stacking .
11. Various stock cutting range from light paper to B-flute .

SBL-1300SEF